

DRAFT COPY

This document is a preliminary draft whose formatting is not yet finalized for insertion into the Sign Standards Manual, to be superseded by the manual's subsequent publication.

The placement of sponsoring agencies' logos as displayed herein is and will remain authorized, per the National Sign Program Manager, 24 Jun 2016.

The use of signs to identify Corps managed or supervised design, construction, and rehabilitation projects - both for military and civil works - is an important part of efforts to keep the public informed of Corps work. A construction project sign package has been adopted for this purpose. This package consists of two signs; one for project identification and the other to show on-the-job safety performance of the contractor.

These two signs are to be displayed side by side and mounted for reading by passing viewers. Exact placement location will be designated by the Contracting Officer's Representative.

The panel sizes and graphic formats have been standardized for visual consistency throughout all Corps operations.

Panels are fabricated using HDO plywood or aluminum with dimensional lumber uprights and bracing. The sign faces are nonreflective vinyl.

All legends are to be in the sizes and typefaces specified and printed or applied to the white panel background following the graphic formats shown on pages 16-2 and 16-4. The Communication Red panel on the left side of the construction

project sign with Corps signature (reverse version) and optional sponsor's logo is printed onto the white background.

A display of these two signs is shown on the following two pages. Mounting and fabrication details are provided on page 16-5.

Special applications or situations not covered in these guidelines should be referred to the District Sign Program Manager.

Below are two samples of the Construction Project Identification sign showing how this panel is adaptable for use to identify either military (top) or civil works projects (bottom). The graphic format for this 4'x 6' sign panel follows the legend guidelines and layout as specified below. The large 4'x 4' section of the panel on the right is to be white with black legend. The 2'x 4' section of the sign on the left

with the full Corps Signature (reverse version) is to be screen-printed Communication Red on the white background. The designation of a sponsor in the area indicated is optional with Military or Civil Works construction signs. Signs may list one sponsoring entity. If agreement on a sponsor designation cannot be achieved, the area should be left blank.

This sign is to be placed with the Safety Performance sign shown on page 4. Mounting and fabrication details are provided on page 16-5.

Special applications or situations not covered in these guidelines should be referred to the district Sign Program Manager.

CID-01 for Civil Works

Legend Group 1: One- to two-line description of Corps relationship to project.
Color: White
Typeface: 1.25" Helvetica Regular
Maximum line length: 19"

Legend Group 2: Division or District Name (optional). Placed below 10.5" reverse Signature (6" Castle).
Color: White
Typeface: 1.25" Helvetica Regular

Legend Group 2a: One- to three-line identification of Military or Civil Works sponsor (optional). Place below Corps Signature to cross-align with Group 5a-b.
Color: White
Typeface: 1.25" Helvetica Regular
Maximum line length: 19"


Legend Group 3: One- to three-line project title legend describes the work being done under this contract.
Color: Black
Typeface: 3" Helvetica Bold
Maximum line length: 42"

Legend Group 4: One- to two-line identification of project or facility (civil works) or name of sponsoring department (military).
Color: Black
Typeface: 1.5" Helvetica Regular
Maximum line length: 42"

Cross-align the first line of Legend Group 4 with the first line of the Corps Signature (US Army Corps) as shown.

Legend Groups 5a-b: One- to five-line identification of prime contractors including: type (architect, general contractor, etc.), corporate or firm name, city, state. Use of Legend Group 5 is optional.
Color: Black
Typeface: 1.25" Helvetica Regular
Maximum line length: 21"

All typography is flush left and rag right, upper and lower case with initial capitals only as shown.

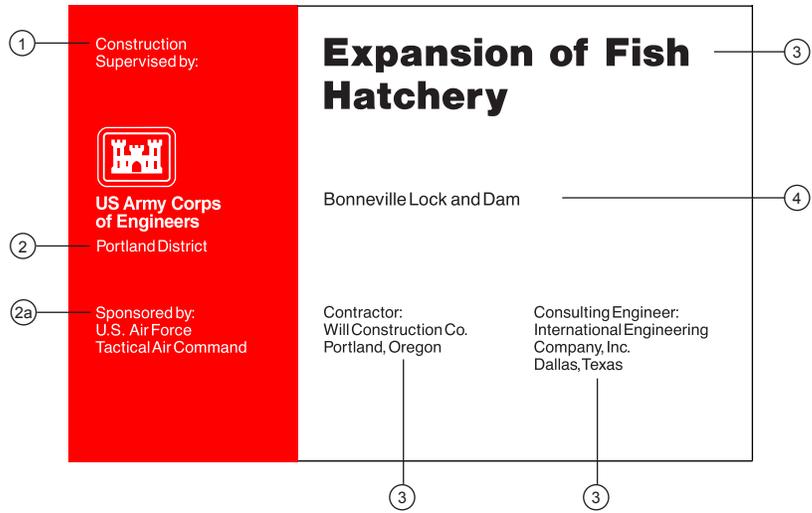

CID-01 for Military Works



| Sign Type | Legend Size (A) | Panel Size | Post Size | Specification Code | Mounting Height | Color Bkg/Lgd |
|-----------|-----------------|------------|-----------|--------------------|-----------------|---------------|
| CID-01 | various | 4'x6' | 4"x4" | HDO-3 | 48" | WH-RD/BK |

The Construction Project Identification sign may include the logo of the primary sponsor. The sponsor is the organization, other than the Corps of Engineers, that is paying the bills. Examples are the U.S. Air Force, American Recovery and Reinvestment Act, FEMA, or another government

agency or program authorization by Congress.

Use of the sponsor's logo is an option. If the logo is used, it will be positioned in the red bar below the Corps Signature

and left justified in place of the legend group 2A. For visual impact, use the simplest version of the sponsor's logo that is available.

Dotted lines shown are for layout purposes and will not appear on the actual sign.

Legend Group 1: One- to two-line description of Corps relationship to project.

Color: White

Typeface: 1.25" Helvetica Regular

Maximum line length: 19"

Legend Group 2: Division or District Name (optional). Placed below 10.5" reverse Signature (6" Castle).

Color: White

Typeface: 1.25" Helvetica Regular

Sponsor's Logo: Graphic identification of Military or Civil Works sponsor (optional, replaces legend group 2A). Place below Corps Signature, left justified, to cross-align with Group 5a-b.

Color: White or full color



Each contractor's safety record is to be posted on Corps managed or supervised construction projects and mounted with the Construction Project Identification sign specified on page 16-2.

The graphic format, color, size and typefaces used on the sign are to be reproduced exactly as specified below. The title

with Safety Green logo in the top section of the sign, and the performance record captions are standard for all signs of this type. Legend groups 2 and 3 below identify the project and the contractor and are to be placed on the sign as shown.

Safety record numbers are mounted on individual metal plates and are screw-

mounted to the background to allow for daily revisions to posted safety performance record.

Special applications or situations not covered in these guidelines should be referred to the District Sign Program Manager.

Legend Group 1: Standard two-line title "Safety is a Job Requirement" with 8" (outside diameter) Safety Green logo. Color: To match Pantone system 347 Typeface: 3" Helvetica Bold Color: Black


Legend Group 2: One- to two-line project title legend describes the work being done under this contract and name of host project. Color: Black Typeface: 1.5" Helvetica Regular Maximum line length: 42"

Legend Group 3: One- to two-line identification: name of prime contractor and city, state address. Color: Black Typeface: 1.5" Helvetica Regular Maximum line length: 42"


Legend Group 4: Standard safety record captions as shown. Color: Black Typeface: 1.25" Helvetica Regular

Replaceable numbers are to be mounted on white .060 aluminum plates and screw-mounted to background. Color: Black Typeface: 3" Helvetica Regular Plate size: 2.5" x 4.5"

All typography is flush left and rag right, upper and lower case with initial capitals only as shown. Letter- and word-spacing to follow Corps standards as specified.

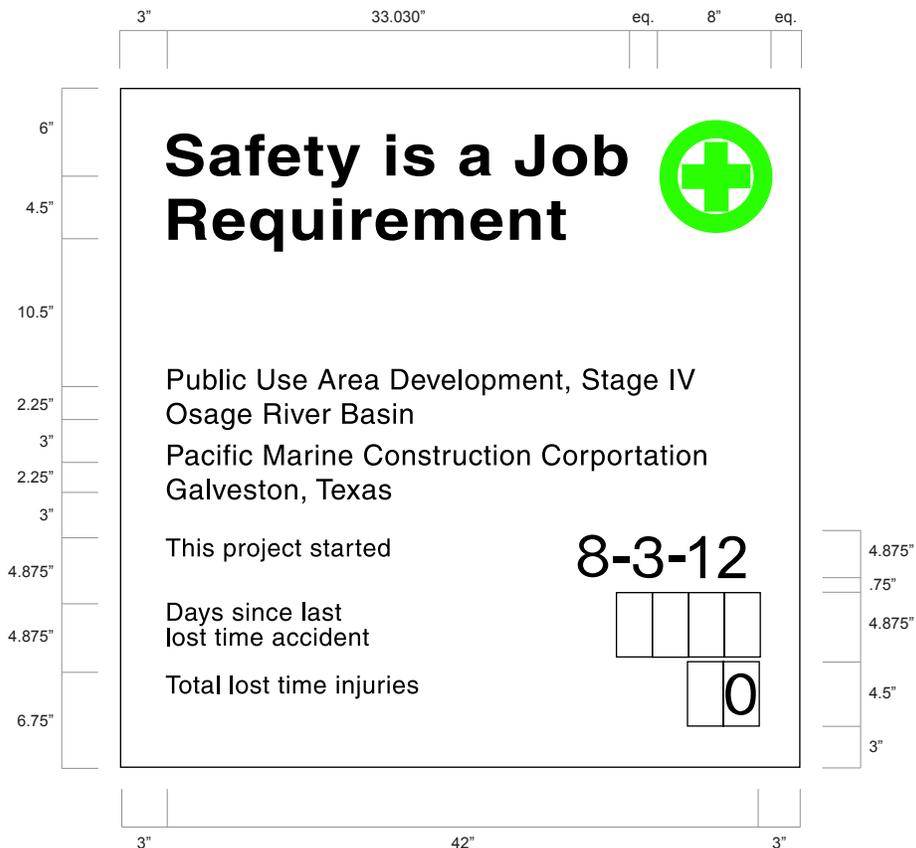

| Sign Type | Legend Size (A) | Panel Size | Post Size | Specification Code | Mounting Height | Color Bkg/Lgd |
|-----------|-----------------|------------|-----------|--------------------|-----------------|---------------|
| CID-02 | Various | 4'x4' | 4"x4" | HDO-3 | 48" | WH/BK-SG |

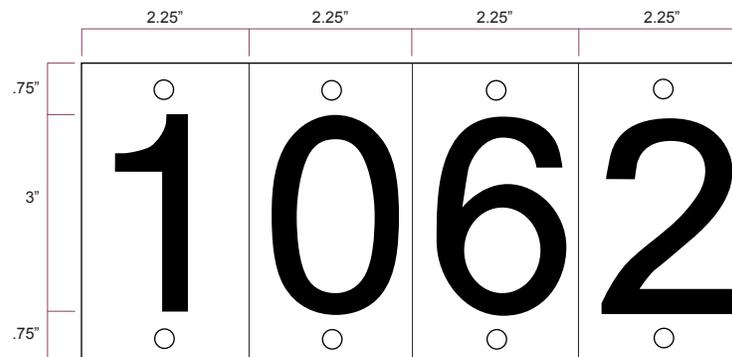

All Construction Project Identification signs and Safety Performance signs are to be fabricated and installed as described below. The signs are to be erected at a location designated by the Contracting Officer Representative and shall conform to the size, format, and typographic

standards shown on pages 16-2, 16-3, and 16-4. Detailed specifications for HDO plywood panel preparation are provided in Appendix B.

project information. Photocopy this page and use as a worksheet when preparing sign legend orders.

Shown below the mounting diagram is a panel layout grid with spaces provided for

For additional information on the proper method to prepare sign panel graphics, contact the district Sign Program Manager.

The sign panels are to be fabricated from .75" High Density Overlay Plywood. Panel preparation to follow HDO specifications provided in Appendix B.

Sign graphics to be prepared on a white nonreflective vinyl film with positionable adhesive backing.

All graphics except for the Communication Red background with Corps signature on the project sign are to be die-cut or computer-cut nonreflective vinyl, pre-spaced legends prepared in the sizes and typefaces specified and applied to the background panel following the graphic formats shown on pages 16-2 and 16-3.


The 2'x 4' Communication Red panel (to match Pantone system 032) with full Corps signature (reverse version) is to be printed on the white background. Identification of the district or division may be applied under the signature with white letters prepared to Corps standards.

Drill and insert six (6) .375" T-nuts from the front face of the HDO sign panel. Position holes as shown. Flange of T-nut to be flush with sign face.

Apply graphic panel to prepared HDO plywood panel following manufacturers' instructions.

Sign uprights to be structural grade 4" x 4" treated Douglas Fir or Southern Yellow Pine, No.1 or better. Post to be 12' long. Drill six (6) .375" mounting holes in uprights to align with T-nuts in sign panel. Countersink (.5") back of hole to accept socket head cap screw (4" x .375").

Assemble sign panel and uprights. Imbed assembled sign panel and uprights in 4' hole. Local soil conditions and/or wind loading may require bolting additional 2" x 4" struts on inside face of uprights to reinforce installation as shown.

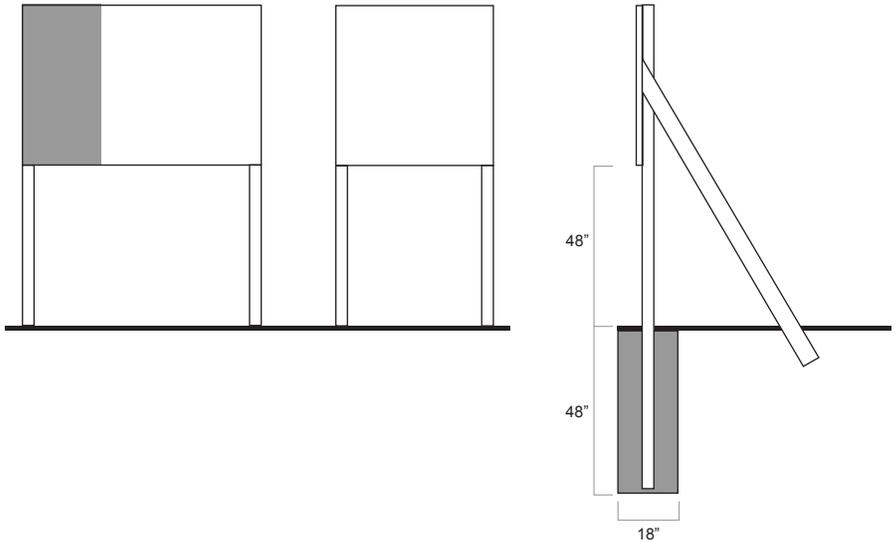

Construction Project Sign
Legend Group 1: Corps Relationship

1. _____
2. _____

Legend Group 2: Division/District Name

1. _____
2. _____

Legend Group 2a: Military/Civil Works Sponsor

1. _____
2. _____

Legend Group 3: Project Title

1. _____
2. _____
3. _____

Legend Group 4: Facility Name

1. _____
2. _____

Legend Group 5: Contractor/A&E

1. _____
2. _____
3. _____
4. _____
5. _____

Legend Group 5b: Contractor/A&E

1. _____
2. _____
3. _____
4. _____
5. _____

Safety Performance Sign

Legend Group 2: Project Title

1. _____
2. _____

Legend Group 3: Contractor/A&E

1. _____
2. _____